

cnVision Client MAXrp

Purpose-built Wireless Transport for Video Surveillance / CCTV

QUICK LOOK:

- Robust wireless links optimized for video traffic
- Up to 600 Mbps 50 feet to 5 miles (15 meters to 8 kilometers)
- Directly Power/Connect up to three PoE cameras or other PoE devices with MAXrp
- Outdoor deployments for all weather conditions
- Compatible with IP-based cameras (including ONVIF integration)
- · VMS Integration



cnVision is a purpose-built wireless transport solution for CCTV and Video Surveillance applications. System Integrators around the world use cnVision to deploy cameras quickly and securely where they are needed rather than just where the fiber extends. cnVision is deployable in both point-to-point or point-to-multipoint topologies. Combining unique capabilities like ONVIF integration for cameras and VMS integration for management with Cambium's proven radio technology, cnVision gives system integrators the tools they need to deploy private wireless surveillance networks profitably and reliably.

The cnVision portfolio consists of six different hardware modules and the software that makes planning, deployment and management straight-forward and reliable for even the most critical security and surveillance requirements. In simple point to point deployments the Client MICRO, MINI and MAXr or MAXrp can be deployed at ranges from 15 meters to 8 kilometers (50 feet to 5 miles).

Where multiple camera locations are needed surrounding a building or property, a hub and spoke or point-to-multipoint architecture can be deployed with the HUBr or FLEX360 serving as the hub and any of the clients serving as the spokes.

Client MAXrp is the latest addition to cnVision, which simplifies edge camera deployments with integrated wireless transport plus three PoE output ports directly connecting to cameras or other security devices. Three integrated PoE output ports eliminate extra cabling, separate power supplies and an Ethernet switch, simplifying the installation. Any combination of three standard PoE devices can be used with the MAXrp including cameras, Wi-Fi access points, digital signs, access controls, emergency phones, etc.

Designed and built for outdoor conditions, cnVision has models with IP67 ruggedization and all hardware includes Cambium Networks' 3-year hardware warranty.


Plan your CCTV/Video surveillance wireless network using the cnVision Companion tool to determine how many cameras at which particular frame rate and resolution can be carried by each cnVision client.

Contact your cnVision System Integrator for more information or visit www.cambiumnetworks.com/cnvision.

©2021 Cambium Networks, Ltd 1 cambiumnetworks.com




cnVision Client MAXrp for Wireless Video Surveillance

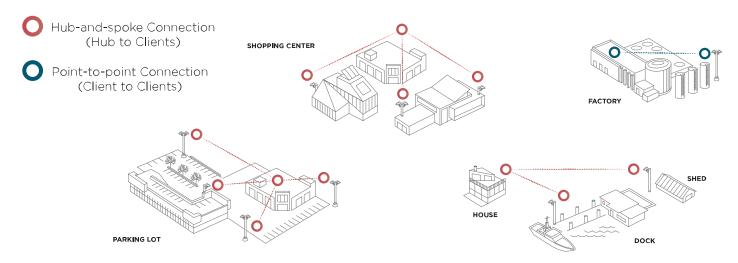


Features		
CCTV Centric Wireless	Proprietary wireless interface minimizing frame loss, jitter and latency while maximinizing video	
	transmission performance	
ONVIF	ONVIF support to detect camera models, stream information	
VMS Integration	Integrates most popular Video Management Systems for monitoring radio performance.	
	See next page or visit www.cambiumnetworks.com/cnvision for list of supported VMS	
PoE Output Ports	Connect up to three external PoE cameras directly to the MAXrp; 2 Standard PoE and 1 Passive 24/56V	
	or non-standard devices	
All-In-One Management	Accompanying tool to discover, plan, configure and monitor	
Range	50 feet to 5 miles (15 meters to 8 kilometers) with optional antenna accessories	
Max Throughput	Up to 600 Mbps of UDP/TCP throughput	
Security	128-bit AES Encryption (256-bit option where allowed), HTTPS, SSH, RADIUS management	
Reliabilty	-30°C to 60°C (-22°F to 140°F) operation, IP55 & IP67 options	
Warranty & Support	3 year warranty, 24/7 support	







cnVision Client MAXrp for Wireless Video Surveillance

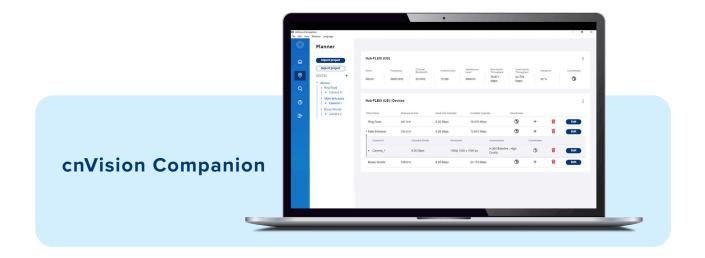




Live Streaming with ONVIF Integration



VMS Integration



VMS Integration		
Genetec		
Milestone XProtect		
Axis Camera Station		
Network Optix		
Wisenet Wave		
Avigilon Control Center		
Digifort		
Hikvision (funnel)		
Indigo Vision (funnel)		



cnVision Client MAXrp for Wireless Video Surveillance







Specifications	
Primary Use	High gain client can directly power up to three IP cameras or devices
Antenna Type	Flat Panel
Antenna Gain	19 dBi
Antenna Beamwidth	
Azimuth	3 dB - 14.5°
Elevation	3 dB - 12.5°
Power Consumption	12W; up to 45W maximum PoE out shared across three output ports.
Input voltage	48V PoE (802.3at compliant)
Dimensions	$27.8\times27.8\times4.5$ cm (10.9 \times 10.9 \times 1.8 in) without mounting bracket
Weight	1.9 kg (4.2 lbs)
Environmental	IP67
Temperature	-30°C to 60°C (-22°F to 140°F)
Wind Survival	200 km/h (124 mph)
Certifications	FCCID - Z8H89FT0048; IC - 109W-0048; CE - EN 301 893 V2.1.1 (5.4 GHz), EN 302 502 V2.1.1 (5.8 GHz)

MAXrp Ordering Information		
Region/Cord Type		
FCC/US	CV-P19RPUSA-US	
IC Canada/US	CV-P19RPUSA-IC	
EU/EU	CV-P19RPEUA-EU	
EU/UK	CV-P19RPUKA-EU	
ROW No Cord	CV-P19RPXXA-RW	
ROW/US	CV-P19RPUSA-RW	
ROW/EU	CV-P19RPEUA-RW	
ROW/UK	CV-P19RPUKA-RW	
ROW/India	CV-P19RPINA-RW	
India	CV-P19RPINA-IN	
ROW/China	CV-P19RPCNA-RW	
ROW/Brazil	CV-P19RPBRA-RW	
ROW/Argentina	CV-P19RPARA-RW	
ROW/ANZ	CV-P19RPANA-RW	
ROW/South Africa	CV-P19RPSAA-RW	
ROW No PSU	CV-P19RX00A-RW	

ABOUT CAMBIUM NETWORKS

Cambium Networks empowers millions of people with wireless connectivity worldwide. Its wireless portfolio is used by commercial and government network operators as well as broadband service providers to connect people, places and things. With a single network architecture spanning fixed wireless and Wi-Fi, Cambium Networks enables operators to achieve maximum performance with minimal spectrum. End-to-end cloud management transforms networks into dynamic environments that evolve to meet changing needs with minimal physical human intervention. Cambium Networks empowers a growing ecosystem of partners who design and deliver gigabit wireless solutions that just work.

cambiumnetworks.com